(51) International Patent Classification 6 :	A1	(11) International Publication Number: WO 99/60809
H04Q 7/36		(43) International Publication Date: 25 November 1999 (25.11.99)

(72) Inventors: FREDRIK, Ovesjö; Ankdammsgatan 36, S–171 67 Solna (SE). JONAS, Karlsson; Ichibankan 5F, YRP Center, 3–4, Hikarino–oka, Yokosuka, Kanagawa 239–0847 (JP). SARA, Mazur; Skaldevägen 59, S–167 73 Bromma (SE). FREDRIK, Kronestedt; St. Eriksgatan 54, S–112 34 Stockholm (SE).

(74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S–164 80 Stockholm (SE).

(54) Title: CODED ALLOCATION FOR SECTORISED RADIOCOMMUNICATION SYSTEMS
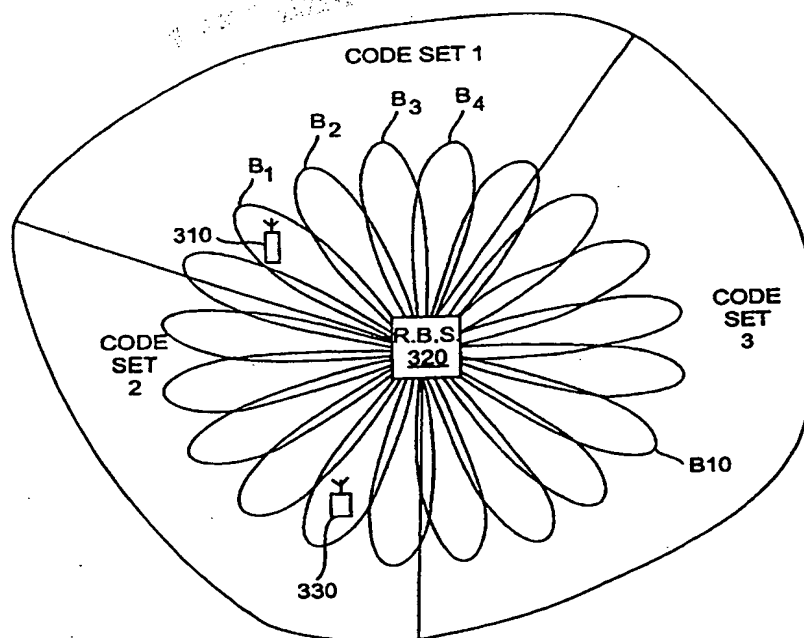
(57) Abstract

Multiple code sets are introduced in the downlink of a CDMA system to allow for more connections in each cell. The codes are then allocated to different users taking into account the interference therebetween. The interference depends on the antenna gains, transmission powers used and cross–correlations between codes. By estimating these parameters the interference can be minimized in the code allocation process. Since the allocation of codes and code sets to geographical areas within a cell may change over time, code handoff is supported.

CODED ALLOCATION FOR SECTORISED RADIOCOMMUNICATION SYSTEMS

BACKGROUND

5   This invention generally relates to spread spectrum radiocommunication systems and, more particularly, to techniques for efficiently allocating spreading codes used to spread information to be transmitted in such systems.

Cellular radio communication systems have recently been developed that use spread spectrum modulation and code division multiple access (CDMA) techniques. In

10   a typical direct sequence (DS) CDMA system, an information data stream to be transmitted is superimposed on a much-higher-symbol-rate data stream sometimes known as a spreading sequence. Each symbol of the spreading sequence is commonly referred to as a chip. Each information signal is allocated a unique spreading code that is used to generate the spreading sequence typically by periodic repetition. The

15   information signal and the spreading sequence are typically combined by multiplication in a process sometimes called coding or spreading the information signal. A plurality of spread information signals are transmitted as modulations of radio frequency carrier waves and are jointly received as a composite signal at a receiver. Each of the spread signals overlaps all of the other coded signals, as well as noise-related signals, in both

20   frequency and time. By correlating the composite signal with one of the unique spreading sequences, the corresponding information signal can be isolated and decoded.

As radiocommunication becomes more widely accepted, it will be desirable to provide various types of radiocommunication services to meet consumer demand. For example, support for facsimile, e-mail, video. internet access, etc. via

25   radiocommunication systems is envisioned. Moreover, it is expected that users may wish to access different types of services at the same time. For example, a video conference between two users would involve both speech and video support. Some of these different services will require relatively high data rates compared with speech service that has been conventionally supplied by radio communication systems, while

30   other services will require variable data rate service. Thus, it is anticipated that future

-2-

radio communication systems will need to be able to support high data rate

communications as well as variable data rate communications.

Wideband DS-CDMA is regarded as one candidate for next generation

radiocommunication systems that will supply such high data rate communication

5   services. Despite the relatively high spectral efficiency inherent in wideband DS-

CDMA techniques, there may be a need to improve the performance of these

techniques in order to provide the required high data rates and quality. One proposed

technique for augmenting wideband DS-CDMA systems is to use adaptive antennas to

transmit signals in wideband DS-CDMA systems. Adaptive antennas direct signal

10   energy associated with specific mobile units into specific geographical areas so that

mobile units outside of those areas are not interfered by that signal energy. The use of

adaptive antennas in wideband DS-CDMA systems mitigates the self-interference

limitation inherent to CDMA systems to an extent that such systems may instead be

limited by the number of available spreading codes.

15   To Applicants' knowledge, this problem of code limitation is not widely

recognized since CDMA systems have traditionally been unable to tolerate the

interference associated with transmitting signals using all of the available codes in a set.

To better understand this new problem, it is helpful to understand how code sets are

used in conventional CDMA systems.

20   In traditional DS-CDMA systems, different cells use different sets of codes for

communication. By having reasonably low cross-correlation between the codes in one

set and the codes in other sets, the available frequency bandwidth can be completely

reused in each cell. Each code set typically contains a plurality of orthogonal

spreading codes that are used to separate different physical channels within the cell.

25   This helps to reduce the downlink intra-cell interference, especially in propagation

environments with few multipath components, but also in other, more time dispersive,

environments. The number of available orthogonal codes of a certain length is equal to

the length of the code, i.e., for a 64 bit code, there are 64 orthogonal codes in each set.

-3-

As mentioned earlier, it has conventionally not been possible to simultaneously use all of the codes in a set to transmit information on the downlink due to the self-interference between the transmissions. However, with the introduction of adaptive antennas the interference in the downlink can be reduced to an extent that it will be possible to significantly increase system capacity. For example, shifting from a conventional one antenna implementation to N antennas can provide a capacity increase on the order of N. Under these circumstances, the number of codes available may be the limiting capacity factor rather than downlink interference.

Accordingly, it would be desirable to create new techniques and systems for allocating codes in a flexible manner that permits code reuse sufficient to exploit the full capacity increase potential available by using adaptive antennas in wideband DS-CDMA systems.

SUMMARY

These and other problems associated with previous communication systems are solved by Applicants' invention, wherein multiple downlink spreading code sets are managed in such a way as to minimize interference between users in radio-communication systems using adaptive antennas. Interference between users is dependent on the antenna gain used for transmission to the users, the transmission power and the cross-correlation between the users' codes. Thus, the present invention uses knowledge of these parameters in allocating codes to users in a manner intended to reduce interference.

For example, mobile stations having antenna gains that interfere severely with each other can be allocated codes having the best cross-correlation properties, i.e., codes in the same code set. In systems which use direction-of-arrival (DOA) information to determine how to steer the downlink signals toward a particular mobile station, this same DOA information can be used as an indicator of how severely different mobile stations' antenna gains will interfere with each other. Thus, exemplary embodiments of the present invention can allocate codes from one set to the right half of a cell and codes from another set to the left half of a cell in order to

-4-

minimize interference. In this way, the relatively high cross-correlation between intra-cell transmissions using codes in different sets is suppressed by the gain of the antenna gain.

5   BRIEF DESCRIPTION OF THE DRAWINGS

The features and objects of Applicants' invention will be understood by reading this description in conjunction with the drawings, in which:

FIG. 1 is a diagram of an exemplary, conventional radiocommunication system in which the present invention can be implemented;

10   FIG. 2 illustrates the usage of spreading codes and scrambling codes in a CDMA transmitter;

FIG. 3 illustrates the usage of relatively narrow beams to provide radiocommunication services;

FIG. 4 is a block diagram of an exemplary transmitter using an adaptive array

15   antenna structure;

FIG. 5 is a flowchart illustrating the allocation of codes to support connections according to an exemplary embodiment of the present invention;

FIG. 6 is a flowchart illustrating the allocation of codes to support connections according to an exemplary embodiment of the present invention; and

20   FIGS. 7(a)-7(c) provide conceptual illustrations of the dynamic association between code sets and geographic areas within a cell.

DETAILED DESCRIPTION

While this description is written in the context of cellular communications

25   systems involving portable or mobile radio telephones, it will be understood by those skilled in the art that Applicants' invention may be applied to other communications applications. Figure 1 illustrates an example of a conventional cellular radio communication system 100. The radio communication system 100 includes a plurality of radio base stations 170a-n connected to a plurality of corresponding antennas 130a-

30   n. The radio base stations 170a-n in conjunction with the antennas 130a-n

-5-

communicate with a plurality of mobile terminals (e.g. terminals 120a, 120b and 120m) within a plurality of cells 110a-n. Communication from a base station to a mobile terminal is referred to as the downlink, whereas communication from a mobile terminal to the base station is referred to as the uplink.

5   The base stations are connected to a mobile telephone switching office (MSC) 150. Among other tasks, the MSC (via its connection to a radio network controller (RNC)) coordinates the activities of the base stations, such as during the handoff of a mobile terminal from one cell to another. The MSC, in turn, can be connected to a public switched telephone network 160, which services various communication devices 10   180a, 180b and 180c.

According to exemplary embodiments of the present invention, DS-CDMA systems can support high bit rate services using physical channels organized in frames of equal length (timewise). Each frame carries an integer number of chips and an integer number of information bits. The physical channels carrying the data and the 15   control information (e.g., including pilot/reference symbols for channel estimation, power control commands and rate information of the data) can be denoted as physical data channel (PDCH) and physical control channel (PCCH). Each connection between a mobile station and a base station will be supported by a PCCH and at least one PDCH.

20   This concept is illustrated in Figure 2 wherein two radio bearers (RB1 and RB2) provide data blocks to multiplexor 200. The selected blocks are provided with forward error correction (FEC) coding at block 202 and are then interleaved at block 204 prior to being spread using the channelization code associated with PDCH1 at block 206. Similar branches, not completely shown, can be provided for PDCH2 and the PCCH. 25   Each of the resulting physical channels is then summed at block 208 and scrambled at block 210 using a scrambling code prior to transmission. Modulation, amplification and coupling to an antenna are provided downstream, although not shown in this figure.

As mentioned above, a code set describes the combination of a set of 30   channelization codes and a particular scrambling code, which set has some preferred

-6-

correlation property (e.g., orthogonality). Techniques for creating and manipulating code sets are described in Swedish Patent Application No. SE9703161-1, entitled "Methods for Telecommunication" filed on September 2, 1997 to Erik Dahlman, the disclosure of which is incorporated here by reference. Applicants have created

5   techniques and systems for determining from which code set to allocate a code to particular mobile stations/connections as described below in conjunction with systems which employ adaptive antennas. Although the following exemplary embodiments are described in connection with an adaptive antenna array disposed at a base station in a radiocommunication system, those skilled in the art will appreciate that these concepts

10   apply equally to other systems, e.g., systems using spatially distributed antennas wherein a signal can be transmitted using one or several of the antennas.

Figure 3, for instance, illustrates such an exemplary radio communication system 300 including a radio base station 320 employing a fixed-beam phased array (not shown). The phased array generates a plurality of fixed narrow beams (B_1, B_2, B_3,

15   B_4, etc.) which radially extend from the base station 320. Preferably, the beams overlap to create a contiguous coverage area to service a radio communication cell. Although not shown, the phased array can actually consist of three phased array sector antennas, each of which communicates with a 120° swath extending from the base station 320.

20   Figure 3 shows a mobile terminal 310 located within the coverage of one of the beams, B_1. Communication proceeds between the base station 320 and this mobile terminal 310 using the beam B_1, or perhaps, in addition, one or more adjacent beams. Likewise a second mobile terminal 330 communicates with the base station 320 using, at least, beam B_{10}. The reader will appreciate that modern radio communication

25   environments typically include many more mobile terminals within cells, however the two illustrated are sufficient to describe operation of these exemplary embodiments of the present invention.

Adaptive arrays allow for, among other things, the selective transmission of signals in a particular direction. For instance, as shown in Figure 4, an array 400 can

30   be used to transmit a signal at an angle Θ (with respect to the normal of the array)

-7-

toward a target mobile terminal 480, while minimizing transmission of signal energy

intended for mobile terminal 480 in the direction of mobile terminal 470. This is

accomplished by selecting (complex) weights (w_1, w_2, ... w_n) applied to each signal

path (r_1, r_2, ... r_n) to the phased array antenna 400 so as to increase the transmit power

5   of the array in certain angular directions and reduce the transmit power of the array in

other directions (i.e., effectively steering a null toward unintended receiver(s)). The

desired weighting is selected by changing the weighting values used in beamforming

unit 440 by controller 420. Thus, the downlink signal is split at unit 430, weighted for

each antenna element in unit 440 and transmitted via the phased array antenna 400.

10   Since the adaptive antenna array "steers" signal energy toward an intended

mobile station, and therefore away from mobile stations with which that signal energy

will interfere, it becomes possible to use multiple code sets within the same cell.

However, the codes should be allocated from these sets in such a way as to minimize

the interference caused by the reduction in orthogonality which is introduced by the

15   different code sets. This is accomplished by spatially separating, to the extent possible,

the direction in which signals are transmitted using codes from different sets. Several

examples will illustrate code allocation and management according to the present

invention. Although the following description illustrates code allocation decisions

being made in the base station, those skilled in the art will appreciate that these

20   decisions can be made anywhere in the radiocommunication system, e.g., in a radio

network controller, the MSC 150, or some combination of these three entities.

Consider again the example illustrated in Figure 3. According to the present

invention base station 320 will be assigned some predetermined number of code sets

with which to support communication services, each set having a plurality of codes,

25   from which at least one code is allocated for each connection to a remote station. To

simplify this example, assume that this particular base station 320 has two code sets.

Since the cross-correlation between code sets is higher than between codes in the same

set, it is advantageous to use as few code sets as possible to support communications in

any given cell. Thus, although mobile stations 310 and 330 are disposed on roughly

30   opposite sides of the cell, base station 320 would allocate codes from a first code set to

-8-

support communication with these two mobile stations if the loading in that cell was light enough that the number of codes in the first code set was sufficient to satisfy capacity demands. The selection of which code set to allocate from first may be based upon the cross-correlation properties of each code set available to the base station.

5   As more mobile stations become active in the cell, base station 320 may run out of codes in the first code set. At this time, the base station 320 would begin to use codes from the second code set. In order to minimize the additional interference that this will cause within the cell, base station 320 uses spatial information associated with the mobile stations' positions to determine which mobile stations should use

10   connections transmitted using codes in the second set.

This same spatial information is already available in the base station and is also used to identify which of the narrow beams supported by the antenna array should be used to support the connection, i.e., to determine the antenna gain associated with each element for "steering" an energy's signal energy in an appropriate direction. Those

15   skilled in the art will appreciate that there are many techniques which can be used to determine an appropriate antenna gain and that the present invention can allocate codes based on antenna gain determined in any manner.

One technique for determining an appropriate antenna gain is to estimate a mobile station's position or direction. Performing location estimation using array

20   antennas can, for example, be accomplished by connecting each beam in the array to its own, dedicated radio receiver. Then, when a remote terminal transmits to the transceiver, e.g., sends an access burst on the random access channel (RACH), the signal strength and phase can be determined for each beam. The received signal strength and phase in each beam can be used to determine a location estimate using any

25   of the known direction-of-arrival (DOA) algorithms. It is also possible that, in some systems, the mobile station may be responsible for determining and reporting its location using, for example, GPS technology or by measuring time-of-arrival associated with pilot signal transmissions.

Base station 320 uses this location information to determine in which areas of

30   the cell it will use codes from the first code set and which areas of the cell it will use

codes from the second code set. As a relatively simple example, base station 320 could use codes from a first set to establish communications with a newly active mobile station in one-half of the cell (e.g., that containing mobile station 310) and codes from a second set of the cell to establish communications with a newly active mobile station

5   in the second half of the cell (e.g., that containing mobile station 330).

Moreover, once base station 320 has exhausted the codes in the first set and begins to use codes from the second set, it may be advantageous to reallocate codes associated with existing connections rather than merely allocating codes from the second set as new mobile stations become active in the cell. For example, once base

10   station 320 begins to allocate codes from the second set, it may wish to handoff the existing connection between the system and mobile station 330 from a channel using a code from the first set to a channel using a code from a second set to minimize intra-cell interference. This decision to reallocate codes to existing connections will be made, at least in part, based upon a current location of the mobile stations having

15   active connections with the system and based upon an area in which the base station decides to use codes from the second set.

Thus, code allocation techniques according to exemplary embodiments of the present invention can be generalized into two categories, methods for allocating codes to newly active mobile stations in a cell and methods for handling the allocation of

20   codes to mobile stations which have already been allocated a code within the cell. Each of these exemplary techniques will now be described with reference to the flowcharts of Figures 5 and 6, respectively.

In Figure 5, an attempt is made to estimate a new mobile station's position, or at least estimate an angular direction of the mobile station relative to the base station, at

25   step 500. As mentioned above, this can be performed by the mobile station or the system. If performed by the base station, the access on the RACH can be evaluated to determine an angular direction of the mobile station. If the system is successful in estimating a position or angular direction for the new mobile station, then it identifies an appropriate code set at step 504. However, there may be occasions when the

30   received burst is insufficient to determine the mobile station's angular position. In such

-10-

cases, a code is selected from a default set of codes, usually the first set of codes, for the mobile station to use at least temporarily to establish its traffic channel(s) at step 502. If there is only one set of codes currently in use, then the system will select a code from that set regardless of the mobile station's estimated position or angular

5   direction in order to keep intra-cell interference at a minimum. Thus, if a code is available in the identified set at step 506, the flow proceeds to block 508 where a code from that set is allocated and the call is set-up using the selected code.

If the identified code set is fully utilized at step 506, then the system will take measures to obtain a code for the new mobile's connection. One possibility is that the

10   system will evaluate the existing connections that are using codes within the identified set to try to release a code for the new connection. For example, the system can take this opportunity to evaluate those mobile stations that are in soft handoff/macrodiversity (wherein multiple transmission sources, e.g., beams or base stations, are providing substantially the same information to a mobile station over two

15   channels) mode and release weaker branches that are being received by mobile stations at below some threshold. This type of activity may release a code in the identified code set for the new mobile station's connection.

Alternatively, the base station (or system) may opt to begin using another of the plurality of code sets assigned thereto. If so, then the process moves to step 510 in

20   Figure 5 wherein the base station updates the assignment of code sets to angular regions. This step is conceptually illustrated in Figures 7(a) and 7(b). For example, if a first code set is currently being used in a first geographical area and a second code set is currently being used in a second geographical area then the association between code sets and geographical areas could, for example, be as illustrated in Figure 7(a).

25   When a third code set is added, as seen in Figure 7(b) the base station will redefine the regions within which the first and second code sets are currently being used and designate at least one region for the third code set. Note that the areas need not be equal in size since loading in any given area will typically be the dominant factor in determining where code sets will be allocated. This redefinition of association

30   between code sets and geographical areas will generally require that some mobile

stations which have already been allocated a code will be located in a geographical area that has been redesignated as associated with a new code set, e.g., mobile station 330 will change from a using a code in code set 2 to using a code in code set 3. For these mobile stations, a new code can be allocated at step 512. Then the new mobile station

5   is allocated a code in an appropriate code set, which may be the code set identified in step 504 or the new code set, and a connection is established with the system.

Already existing, active connections are also periodically evaluated for optimal code allocation to reduce intra-cell interference. Thus, the process continues in the flowchart of Figure 6 for each connected mobile station. The DOA information is

10   again obtained at step 600. Then, at step 602, the base station determines whether that mobile station is receiving/transmitting information using a code from the proper code set given the current association between geographical areas and code sets. If so, then the process terminates for that mobile station and the system begins to evaluate another existing connection. However, if the code being used by the mobile station is

15   associated with a different code set than that currently associated with the geographical location within in which the mobile station currently resides, e.g., because the mobile station has moved since the last check by the system, then the process moves to step 604. This concept can be seen in Figures 7(b) and 7(c) wherein mobile station 330 has moved from an area in which code set 3 is used to an area in which code set 2 is used.

20   Then, the system determines if a code is available in the code set associated with the mobile station's current geographical area, e.g., code set 2 in the above-example. If so, then a code is allocated at step 606. Otherwise, the base station performs the process described above with respect to steps 510-514 in steps 608-612 of Figure 6, to add a new code set to the code sets currently being used in the cell.

25   It will be apparent to those skilled in the art that implementation of the present invention effectively provides for code handoff when either (1) a new code set is placed in service in a cell or (2) a mobile station moves within a cell to another geographical area currently being serviced by codes in a different set. In either case, code handoff reduces intra-cell interference and promotes the usage of plural, non-orthogonal code

30   sets, which in turn increases capacity.

-12-

Moreover, it should be apparent to those skilled in the art that the assignment of code sets to geographical areas within a cell will vary over time, depending upon traffic loads in different parts of the cell. For example, if a lot of traffic is concentrated in a small portion of a cell, then one or more code sets can be used to supply the needed

5 capacity in that portion of the cell. The code sets may cover different areas or may overlap. Of course the more overlap that is permitted, the more interference the different code sets will generate between transmissions.

The foregoing discussion has focused primarily on traffic channels which provide the active connection between the mobile station and the system. However, the

10 system also can provide control channels which provide overhead information and allow the mobile systems to access the system. A common set of control channels can be provided by the system which are transmitted using known codes. The codes may be associated with one or more code sets, but they should be known *a priori* to the receivers in the mobile stations so that these units can quickly scan for, read and

15 transmit on the control channels.

If the control channels are allocated codes from the first code set, these channels are not affected when additional code sets are introduced. Hence, independently of the number of code sets used in the cell, the mobile knows what codes the common control channels use. When the call is set up using a control channel and its known, associated

20 code, the mobile station can be transferred to another code set (if necessary) than that used for the control channels to support its data communication.

Consider the following example. Assume a system using a combination of channelization codes and scrambling codes, where the common control channels use different channelization codes and the same scrambling code. To acquire a common

25 control channel, a mobile will search for the scrambling code used for that control channel. When the scrambling code is identified, the mobile can read the broadcast channel, make a random access attempt and receive an access grant message on a common control channel (since this channel uses the known scrambling code and a known channelization code). The forward access message can contain information that

30 informs the mobile as to which downlink scrambling code (i.e, which code set) to use

-13-

for its assigned traffic channel(s). If a synchronization channel is used in the search for downlink scrambling codes, that channel should point to the scrambling code used by the common control channels.

Moreover, transmission power can also be considered when allocating codes.

5   For example, a high power user that will generate a lot of interference could be allocated a code in a code set together with a number of low power users.

It will be understood that Applicants' invention is not limited to the particular embodiments described above and that modifications may be made by persons skilled in the art. The scope of Applicants' invention is determined by the following claims, and

10   any and all modifications that fall within that scope are intended to be included therein.

-14-

We Claim:

1. A method for transmitting information to a mobile station in a radiocommunication system comprising the steps of:

5   assigning a first code set and a second code set to a base station, codes within each of said first and second code sets being orthogonal relative to one another;

estimating an angular direction of said mobile station relative to said base station;

identifying one of said first code set and said second code set for said

10   mobile station based on said angular direction;

selecting a code from said identified code set, if a code is available in said identified code set;

spreading and scrambling said information using said selected code; and

transmitting said spread and scrambled information to said mobile

15   station.

2. The method of claim 1, further comprising the step of:
providing said base station with an adaptive antenna array.

20   3. The method of claim 1, further comprising the step of:
providing said base station with a set of spatially distributed antennas.

4. The method of claim 1, wherein each code within said first and second code sets includes a channelization code and a scrambling code.

25

5. The method of claim 1, wherein said step of identifying further comprises the step of:

selecting a code from said first code set until all codes in said first set are allocated.

30

-15-

6.   The method of claim 1, wherein said step of identifying further comprises the step of:

associating a first geographical area to said first set of codes and a second geographical area to said second set of codes.

7.   The method of claim 6, wherein said step of associating further comprises:

determining said first and second geographical areas based upon locations of active mobile stations.

8.   The method of claim 5, wherein said step of identifying further comprises the step of:

associating a first geographical area to said first set of codes and a second geographical area to said second set of codes.

9.   The method of claim 8, wherein said step of associating further comprises:

determining said first and second geographical areas based upon locations of active mobile stations.

10.   The method of claim 9, wherein said step of selecting further comprises the step of:

reassigning, when said first set of codes is exhausted, codes to actively connected mobile stations in communication with said base station based upon their association with one of said first and second geographical areas.

-16-

11. A method for transmitting information to a mobile station in a radiocommunication system comprising the steps of:

assigning a first code set and a second code set to a base station;

determining an antenna gain associated with at least one antenna element for transmitting said information to said mobile station;

selecting a code from one of said first code set and said second code set based, at least in part, on said determined antenna gain; and

transmitting said information to said mobile station using said selected code.

12. The method of claim 11, further comprising the step of:

providing said base station with an adaptive antenna array including said at least one antenna element.

13. The method of claim 11, further comprising the step of:

providing said base station with a set of spatially distributed antennas including said at least one antenna element.

14. The method of claim 11, wherein each code within said first and second code sets includes a channelization code and a scrambling code.

15. The method of claim 11, wherein said step of selecting further comprises the step of:

selecting a code from said first code set until all codes in said first set are allocated.

16. The method of claim 11, wherein said step of selecting further comprises the step of:

associating a first geographical area to said first set of codes and a second geographical area to said second set of codes.

-17-

17.   The method of claim 16, wherein said step of associating further comprises:

determining said first and second geographical areas based upon locations of active mobile stations.

5

18.   The method of claim 15, wherein said step of selecting further comprises the step of:

associating a first geographical area to said first set of codes and a second geographical area to said second set of codes.

10

19.   The method of claim 18, wherein said step of associating further comprises:

determining said first and second geographical areas based upon locations of active mobile stations.

15

20.   The method of claim 19, wherein said step of selecting further comprises the step of:

reassigning, when said first set of codes is exhausted, codes to actively connected mobile stations in communication with said base station based upon their

20   association with one of said first and second geographical areas.

21.   The method of claim 11 wherein said step of determining further comprises the step of:

estimating a position of said mobile station; and

25   determining said antenna gain based on said estimated position.

22.   A radiocommunication system comprising:

a base station for receiving uplink signals from a mobile station and determining an antenna gain for transmitting downlink signals to said mobile station

30   using at least one code to spread information: and

-18-

means for allocating said at least one code from a code set for said downlink signals based on said antenna gain.

23.   The radiocommunication system of claim 22, wherein said means for allocating a code is disposed in said base station.

24.   The radiocommunication system of claim 22, wherein said means for allocating a code is disposed in a radio network controller.

25.   The radiocommunication system of claim 22, wherein said at least one code include a channelization code and a scrambling code.

26.   The method of claim 11, wherein said steps of determining an antenna gain and selecting a code are performed in a base station.

27.   The method of claim 11, wherein said steps of determining an antenna gain and selecting a code are performed in a radio network controller.

28.   The method of claim 11, further comprising the step of:
        broadcasting overhead information on a control channel using a predetermined channelization code and scrambling code associated with one of said first code set and said second code set.

29.   The radiocommunication system of claim 22, wherein said base station transmits a common control channel using a channelization code and a scrambling code which are known to mobile stations.

1/7

Fig. 1
(PRIOR ART)
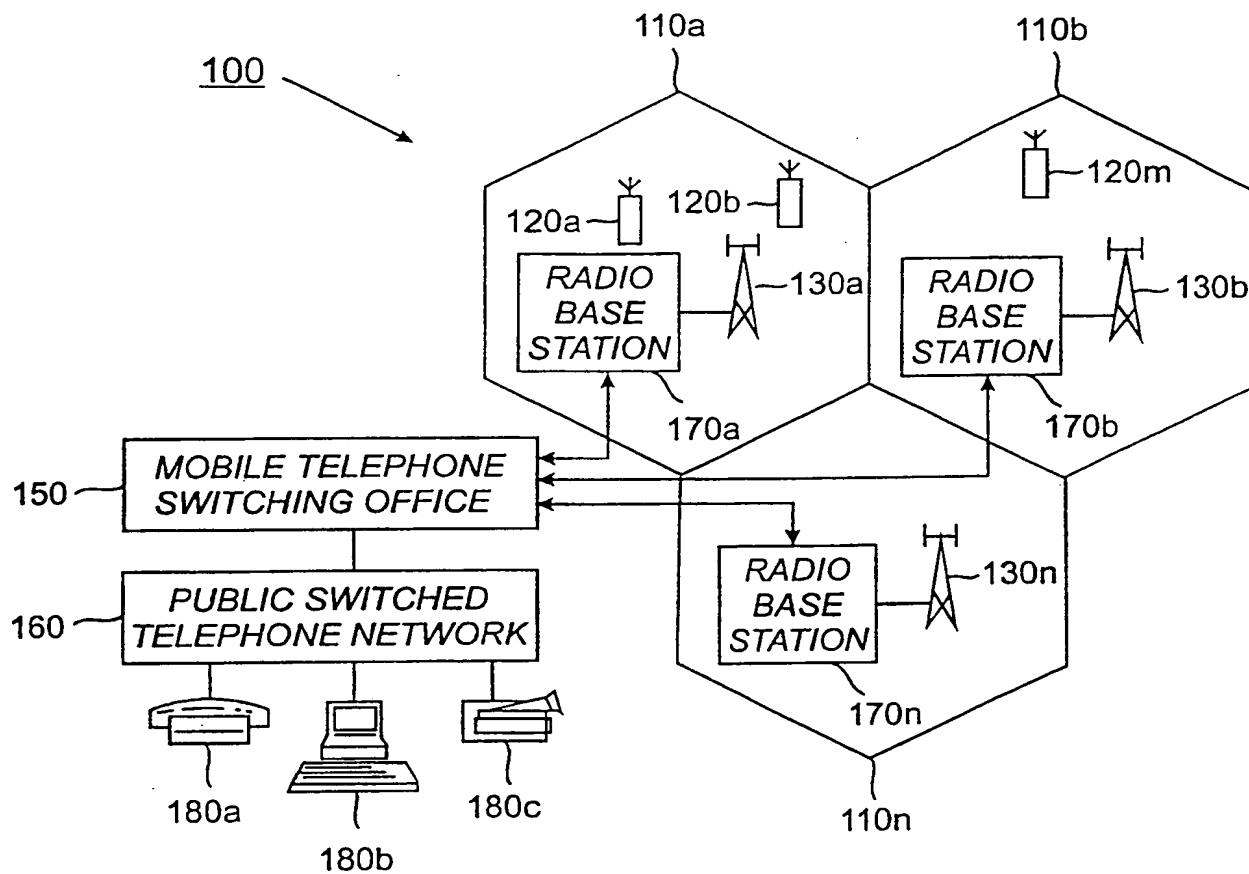
2/7

Fig. 2
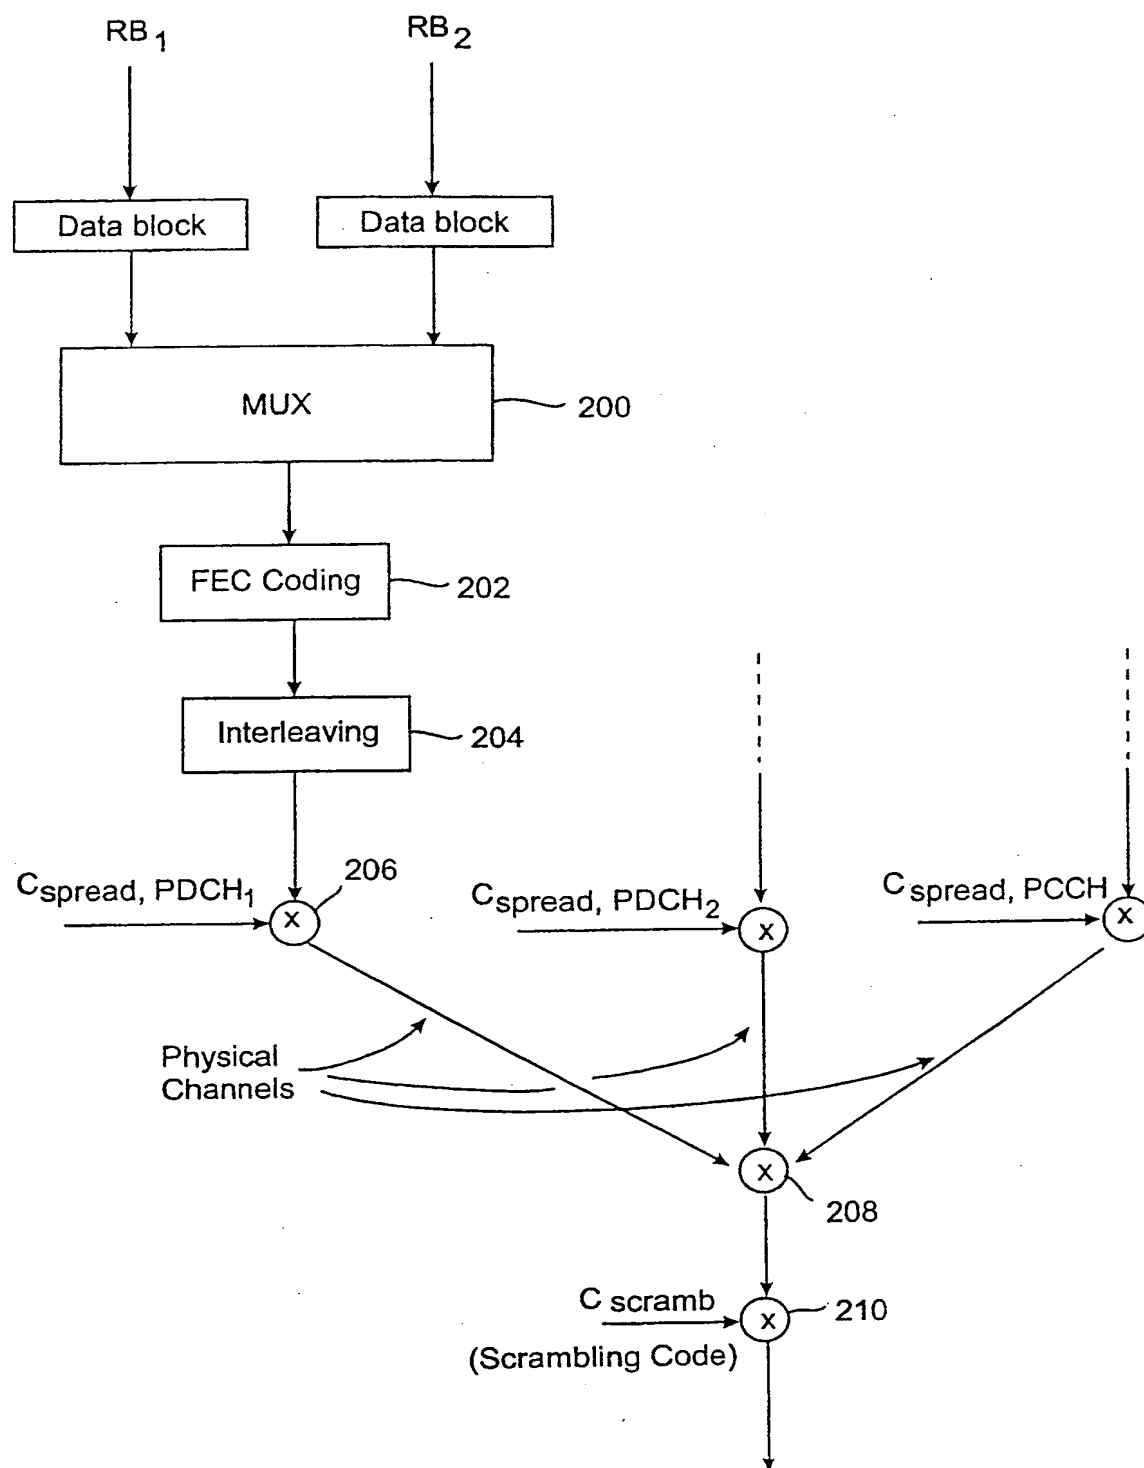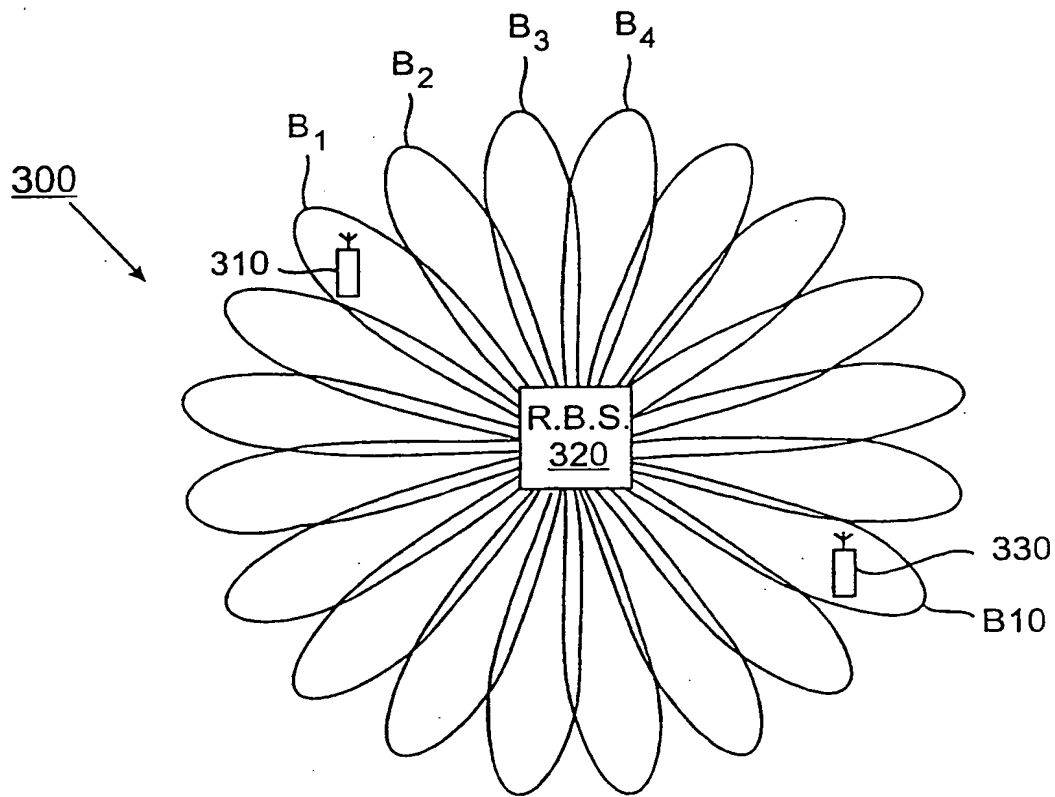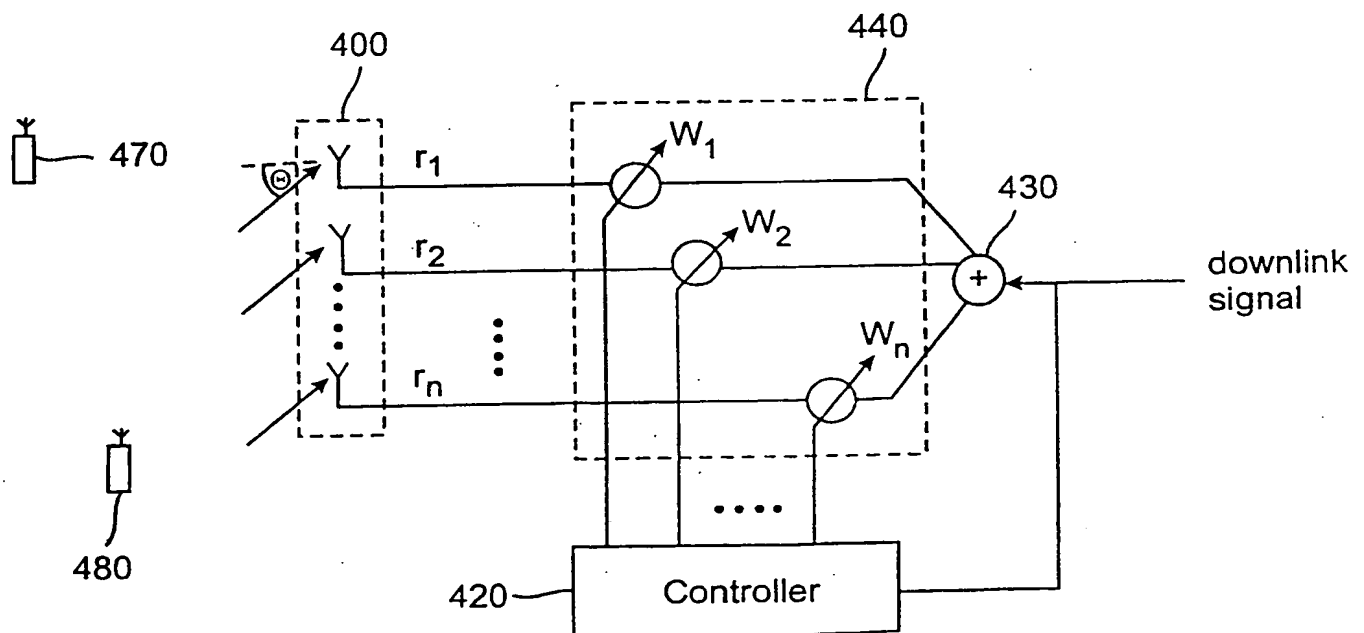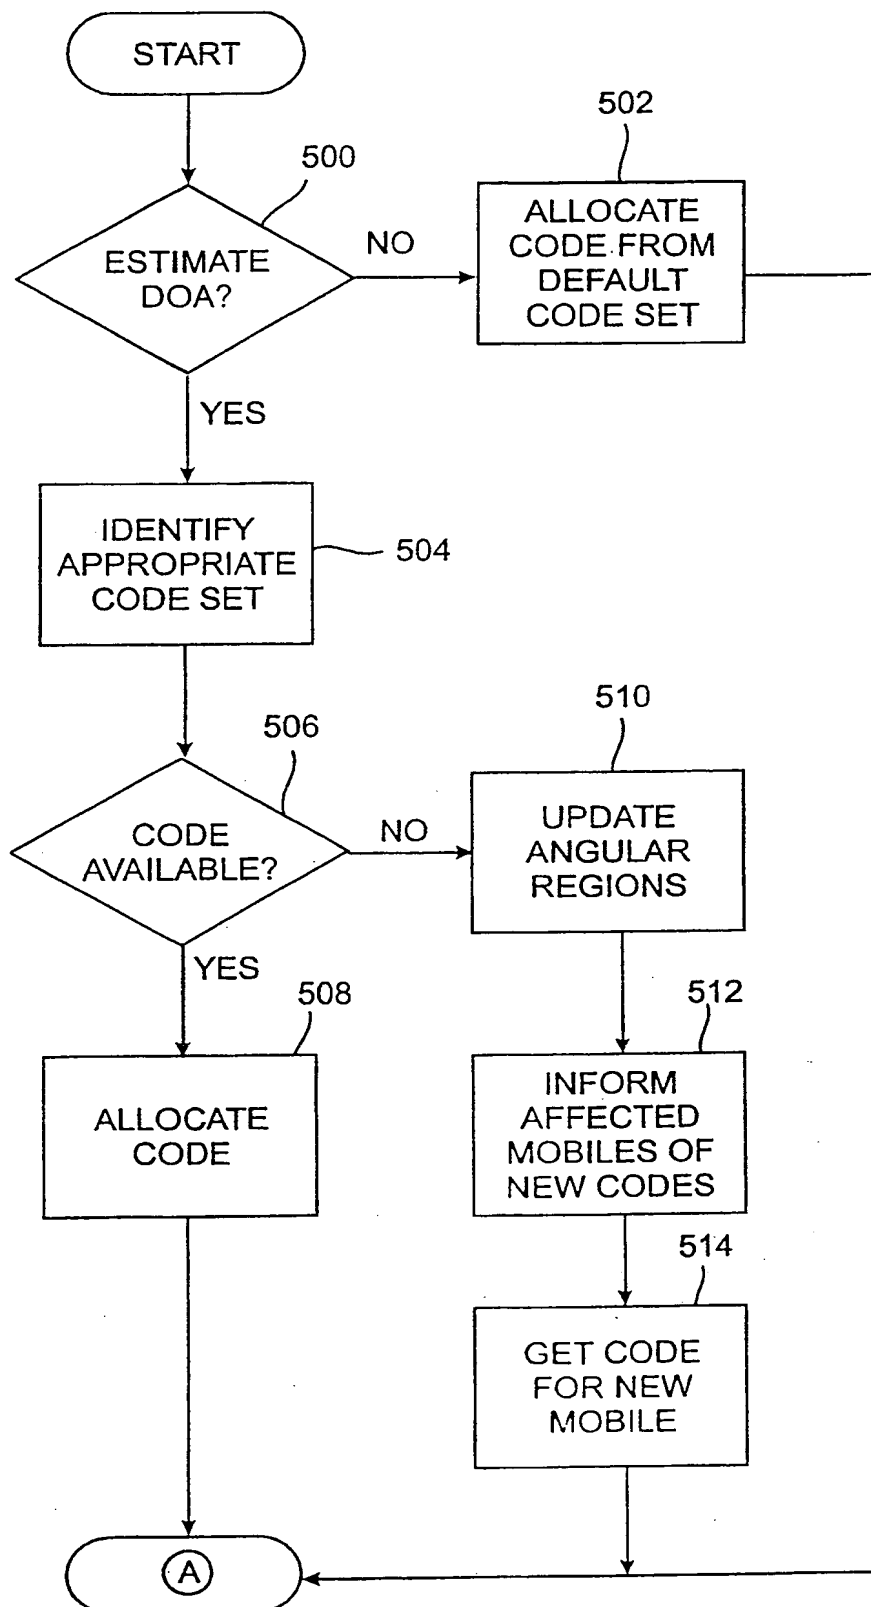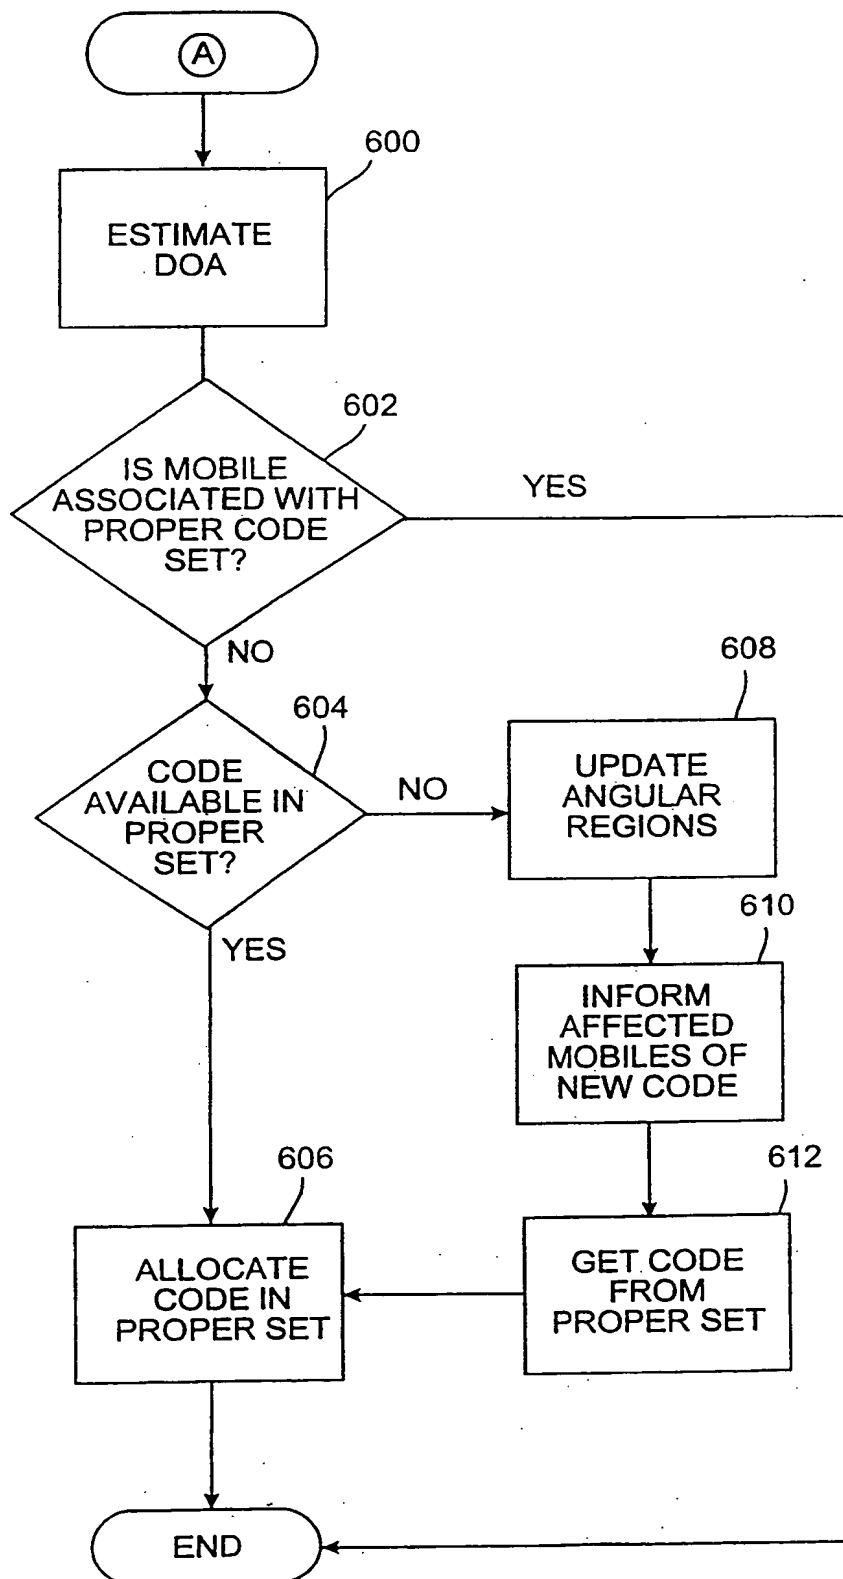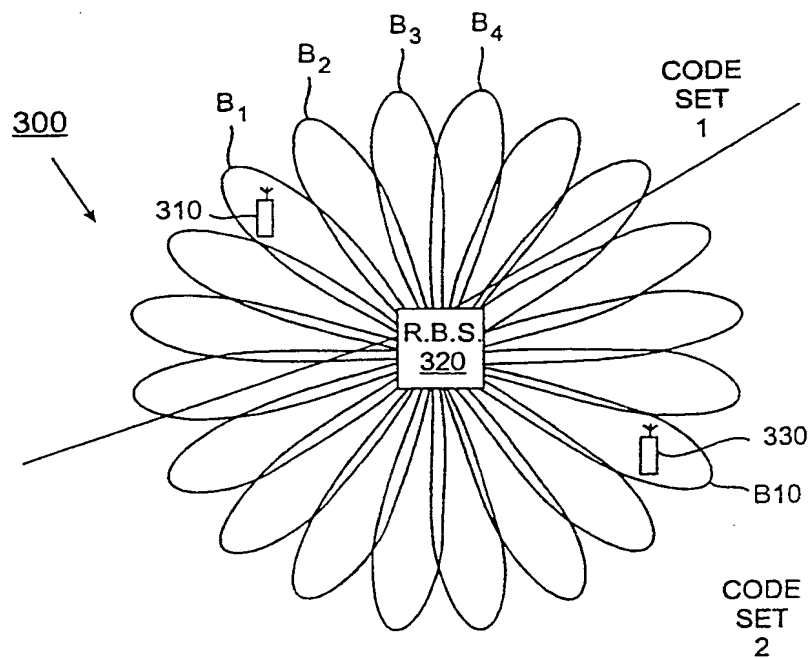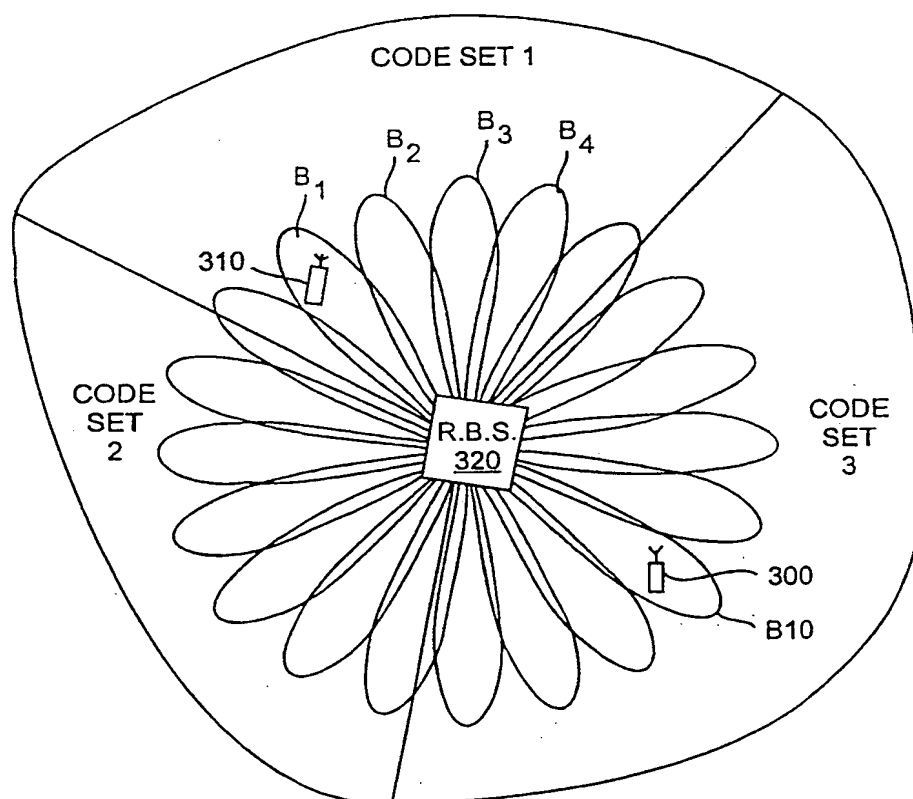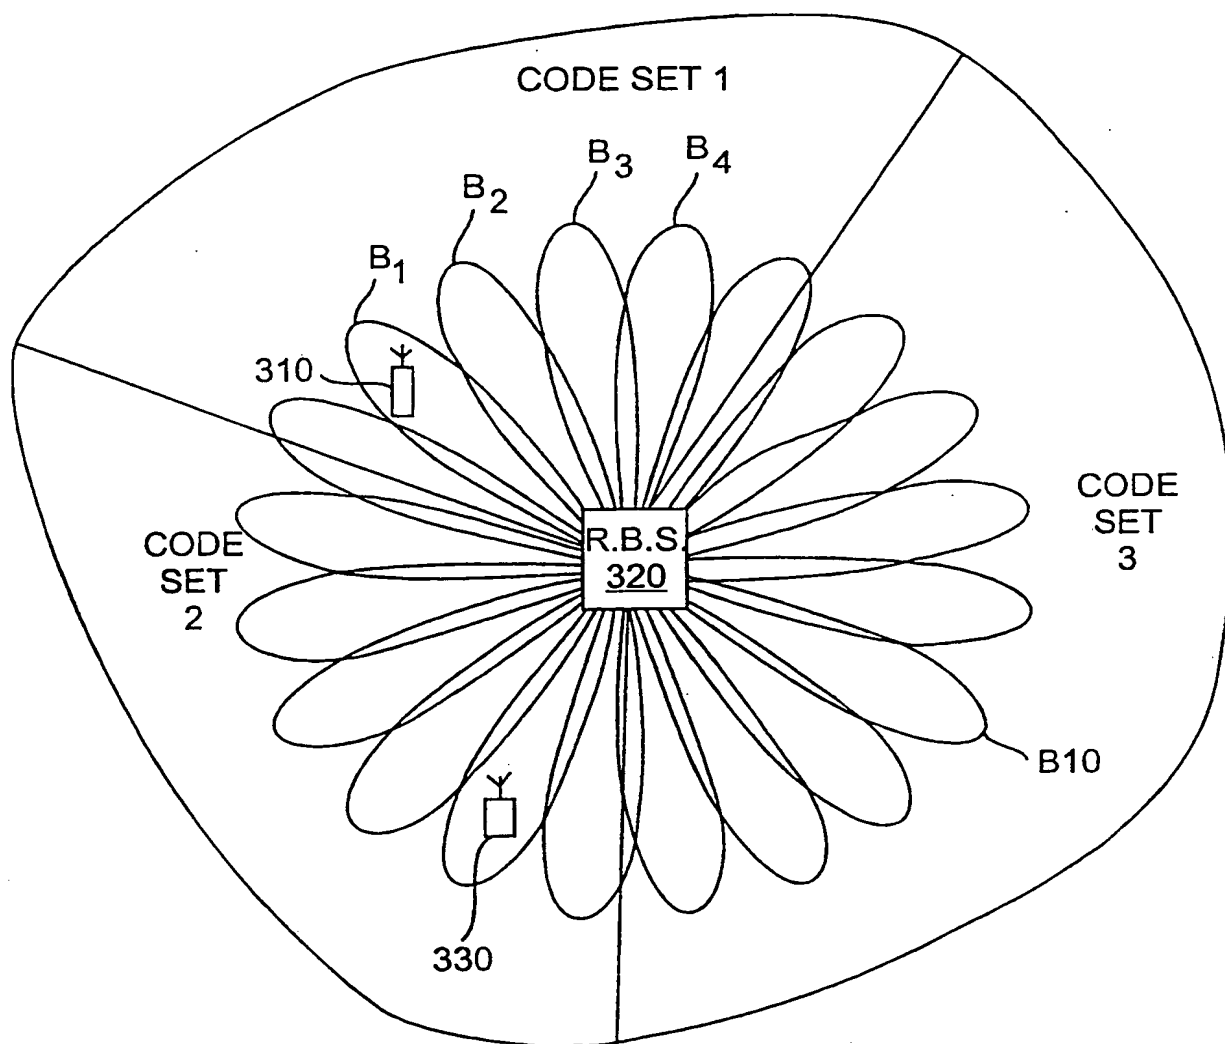
Fig. 3

Fig. 4

4/7
Fig. 5

```
                    ┌──────────┐
                    │  START   │
                    └─────┬────┘
                          │
                          ▼
                        ╱────╲  500
                      ╱        ╲        NO      ┌──────────────┐
                    ╱ ESTIMATE   ╲──────────────│  ALLOCATE    │  502
                    ╲   DOA?     ╱               │ CODE FROM    │
                      ╲        ╱                 │  DEFAULT     │
                        ╲────╱                   │  CODE SET    │
                          │                      └──────┬───────┘
                          │ YES                         │
                          ▼                             │
                    ┌──────────┐                        │
                    │ IDENTIFY │  504                    │
                    │APPROPRIATE│                        │
                    │ CODE SET │                         │
                    └─────┬────┘                         │
                          │                              │
                          ▼                              │
                        ╱────╲  506                       │
                      ╱        ╲       NO    ┌──────────┐ │
                    ╱   CODE     ╲───────────│  UPDATE  │ │ 510
                    ╲ AVAILABLE? ╱           │ ANGULAR  │ │
                      ╲        ╱             │ REGIONS  │ │
                        ╲────╱               └─────┬────┘ │
                          │ YES                    │      │
                          ▼                        ▼      │
                    ┌──────────┐            ┌──────────┐ │
                    │ ALLOCATE │  508        │  INFORM  │ │ 512
                    │   CODE   │             │ AFFECTED │ │
                    └─────┬────┘             │MOBILES OF│ │
                          │                  │NEW CODES │ │
                          │                  └─────┬────┘ │
                          │                        │      │
                          │                        ▼      │
                          │                  ┌──────────┐ │
                          │                  │ GET CODE │ │ 514
                          │                  │ FOR NEW  │ │
                          │                  │  MOBILE  │ │
                          │                  └─────┬────┘ │
                          │                        │      │
                          ▼                        ▼      │
                    ┌──────────┐◄─────────────────┴──────┘
                    │    Ⓐ     │
                    └──────────┘
```

Fig. 6

```
        ┌─────────┐
        │    A    │
        └────┬────┘
             │
             ▼          600
      ┌──────────────┐
      │   ESTIMATE   │
      │     DOA      │
      └──────┬───────┘
             │
             ▼              602
        ╱─────────╲              YES
       ╱  IS MOBILE ╲──────────────────────────┐
      ╱ ASSOCIATED WITH╲                        │
      ╲  PROPER CODE   ╱                        │
       ╲    SET?      ╱                         │
        ╲───────────╱                          │
             │ NO                              │
             ▼         604                     │
        ╱─────────╲                            │
       ╱   CODE    ╲      NO    ┌──────────────┐
      ╱ AVAILABLE IN ╲─────────▶│   UPDATE     │  608
      ╲   PROPER    ╱           │   ANGULAR    │
       ╲   SET?    ╱            │   REGIONS    │
        ╲─────────╱             └──────┬───────┘
             │ YES                     │
             │                         ▼        610
             │                  ┌──────────────┐
             │                  │   INFORM     │
             │                  │  AFFECTED    │
             │                  │ MOBILES OF   │
             │                  │  NEW CODE    │
             │                  └──────┬───────┘
             │   606                   │        612
             ▼                         ▼
      ┌──────────────┐          ┌──────────────┐
      │  ALLOCATE    │          │  GET CODE    │
      │   CODE IN    │◀─────────│    FROM      │
      │ PROPER SET   │          │ PROPER SET   │
      └──────┬───────┘          └──────────────┘
             │
             ▼
        ┌─────────┐
        │   END   │◀──────────────────────────┐
        └─────────┘
```

Fig. 7A

Fig. 7B

Fig. 7C

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6   H04Q7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6   H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 22210 A (QUALCOMM INC) 17 August 1995 (1995-08-17) page 2, line 28 –page 4, line 9 page 7, line 24 –page 8, line 30 page 10, line 17 – line 34 page 16, line 37 –page 17, line 21 page 21, line 34 –page 22, line 32 abstract; figures 1B,1C,2-4	1,2, 4-12, 14-21, 26,28
A	US 5 678 187 A (SILBERSHATZ GIORA ET AL) 14 October 1997 (1997-10-14) column 4, line 27 – line 42 column 5, line 4 – line 23 column 6, line 42 – line 59 column 8, line 52 –column 9, line 12	1,6,7, 11,16, 17,26,28

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
17 September 1999	27/09/1999

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Authorized officer Coppieters, S

1

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9522210	A	17-08-1995	AU	682939 B	23-10-1997
			AU	1876295 A	29-08-1995
			BR	9506683 A	16-09-1997
			CA	2183258 A	17-08-1995
			CN	1146832 A	02-04-1997
			EP	0775393 A	28-05-1997
			FI	963153 A	10-10-1996
			JP	10500807 T	20-01-1998
			ZA	9500797 A	20-06-1996
US 5678187	A	14-10-1997	IL	100028 A	07-10-1994
			US	5428818 A	27-06-1995
			US	5809401 A	15-09-1998
			CA	2098580 A	12-05-1993
			GB	2266434 A,B	27-10-1993
			HK	1000430 A	20-03-1998
			KR	9612086 B	12-09-1996
			SE	9302362 A	08-07-1993
			WO	9310601 A	27-05-1995

THIS PAGE BLANK (USPTO)